

Pin Header

Board Spacer Single Row / Dual Row
Straight S.M.T Type

Pitch:1.27mm


Series

460 12

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873




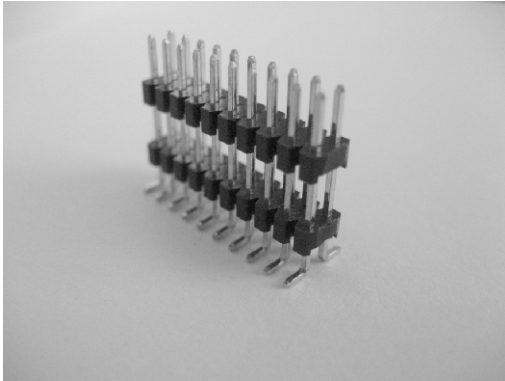


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 1.0 A
Withstand Voltage (耐压值): 500V AC/Min
Insulation Resistance (绝缘电阻): 1000M Ω Min
Contact Resistance (接触电阻): 30m Ω Max
Operation Temperature (工作温度): -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS (材质):

Contact Material (接触件材质): Phosphor Bronze of Brass
Contact Plating (接触件电镀): Gold or Tin over 50u"Ni
Insulator (绝缘体材质): PBT OR PA6T(UL94V-0)

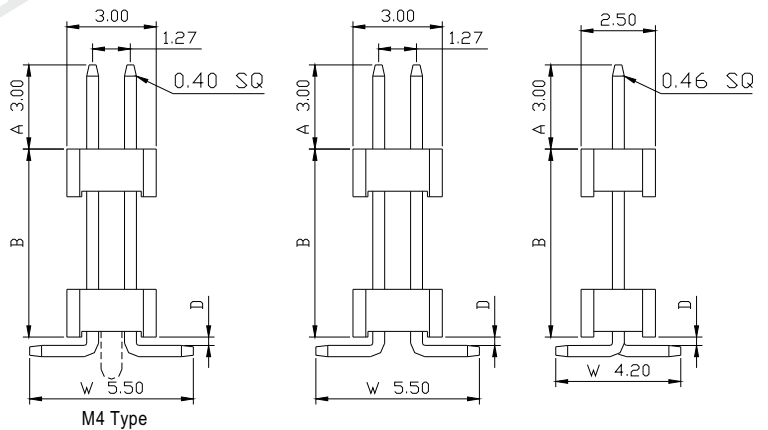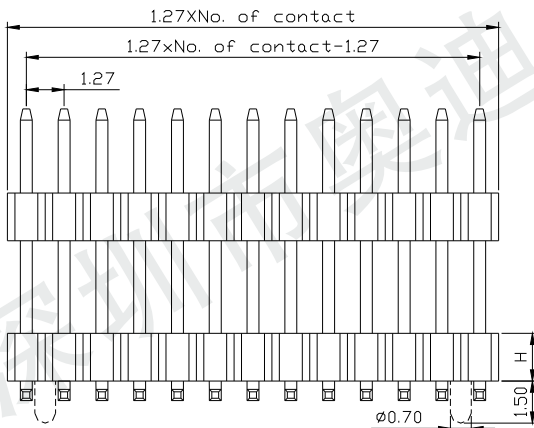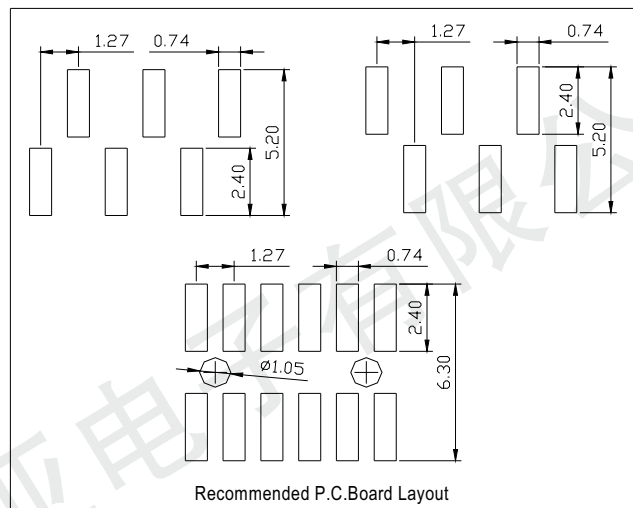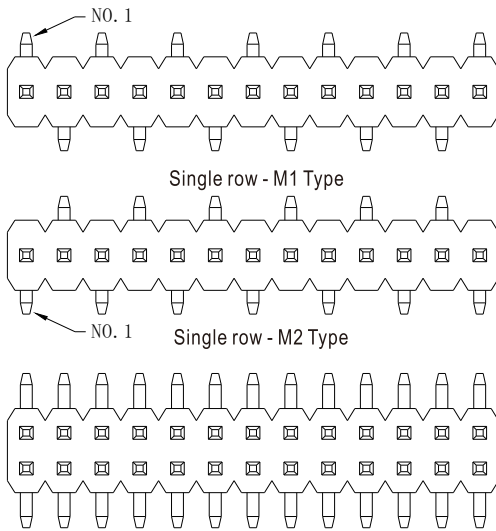

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
46012 1 2 50 M 2 4 2 XXX

- | | | | | |
|---|--|---|--|--|
| <p>① Series No.:
460= Pin Header</p> <p>② Pitch: 12= 1.27mm</p> | <p>③ Insulator Height:
1 = 1.00mm 2 = 2.00mm
3 = 2.50mm 5 = 1.50mm
6 = 1.60mm 7 = 1.70mm
8 = 0.80mm 9 = 0.65mm</p> | <p>④ Number of row:
1=Sing row
2=Double row</p> <p>⑤ Number of Contacts:
Single row=01(1x1)to 50(1x50)
Double row=04(2x2)to 100(2x50)</p> <p>⑥ Tail & Mounting Style:
M=Straight SMT type</p> | <p>⑦ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6= Gold 30u" A=Gold 1.5u"
B=Gold 2u"</p> <p>⑧ Material Type
2=LCP
3=Nylon-9T
4=Nylon-6T
5=PA46</p> <p>⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier</p> | <p>⑩ Pin Length
XXX=A+B+D+(W/2)
XXX=A+B+D+(W-1.27)/2</p> |
|---|--|---|--|--|