


Female Header Pitch:2.00mm
Dual Row /Straight DIP Type

Series
47Y 20


Odia 奥比亚

Tel: (+86)0755-28248661/2/3
Fax: (+86)0755-27857873

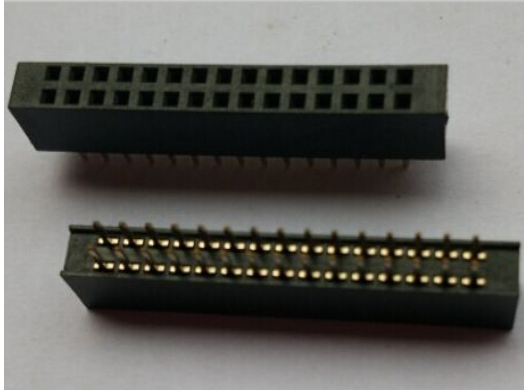

SPECIFICATIONS (技术参数):
 Current Rating (额定电流): 2.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 500VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):
 Contact Material (接触件材质): Phosphor Bronze
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: PA66

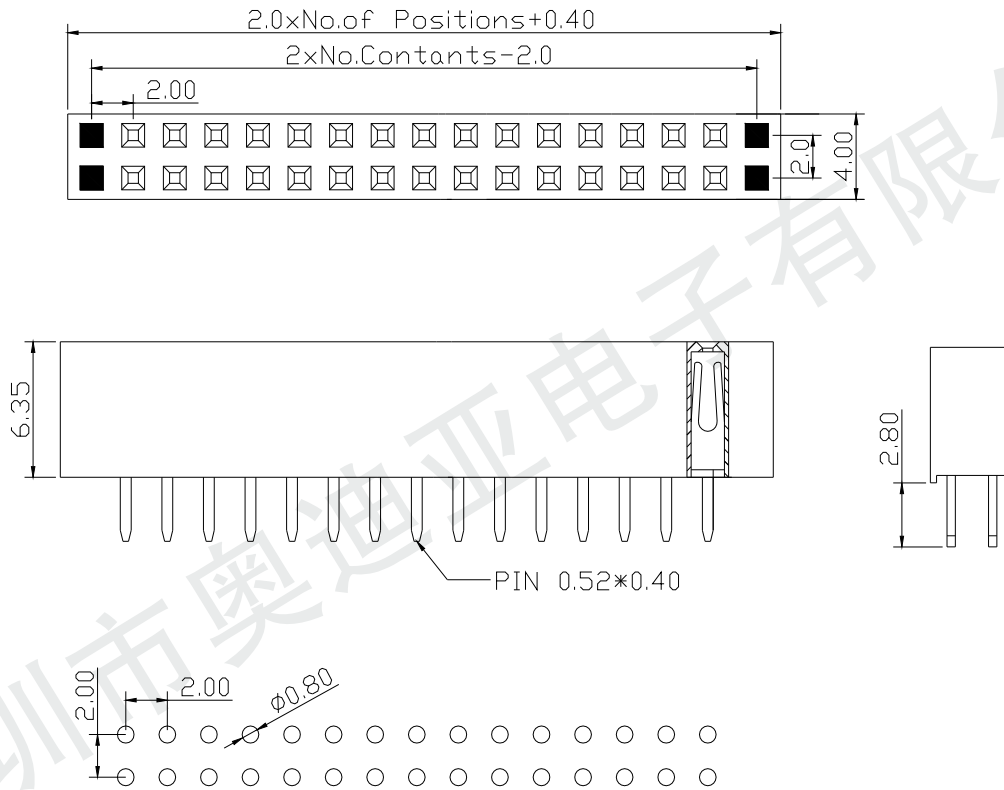

P.C.B. LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
47Y20 A 2 40 S 1 4 1 D4

① Series No.:
47Y = Female Header

③ Insulator Height:
A=6.35mm
7=7.00mm(Double row)

② Pitch: 20 = 2.00mm

④ Number of row:
1=Sing row
2=Double row

⑤ Number of Contacts:
Single row=01(1x1)to 40(1x40)
Double row=04(2x2)to 80(2x40)

⑥ Tail & Mounting Style:
S=Straight DIP type
M=Straight SMT type

⑦ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6= Gold 30u" A=Gold 1.5u"
B=Gold 2u"

⑨ Color:1=Black

⑩ Customer Request
D4= Plastic body is extended
to 2*xxP, blocking the ends 4 hole

⑧ Material Type
0=PPS
1=PBTP
2=LCP
3=Nylon-9T
4=Nylon-6T
5=PA46