


Female Header
Double Row
Splint Type 夹板型

Pitch:200mm

Series
47U

Odia 奥比亚

Tel: (+86)0755-28248661/2/3
 Fax: (+86)0755-27857873







SPECIFICATIONS (技术参数):

Current Rating (额定电流): 2.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 500VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Phosphor Bronze
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: PA66

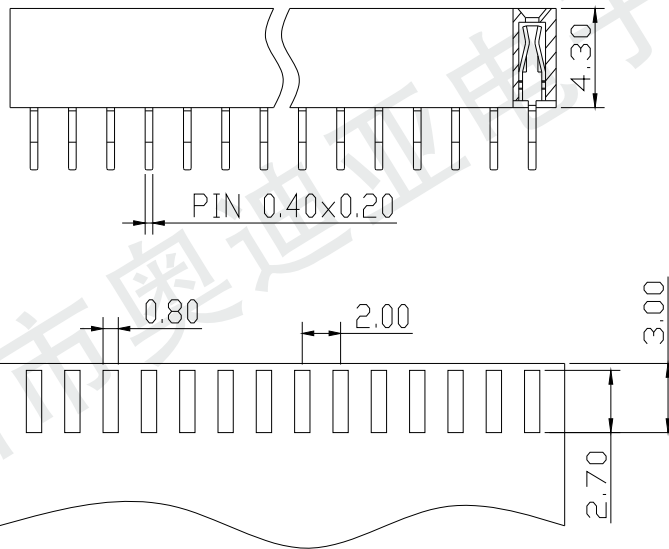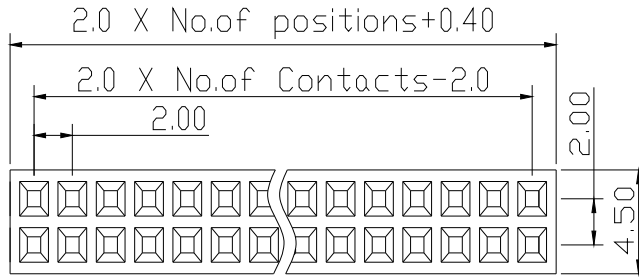

PCB LAYOUT

Ordering Code

①②③④⑤⑥⑦⑧⑨⑩
 47U 20 4 2 40 G 1 4 1 0

① Series No.:
 47U

③ Insulator Height:
 2 = 2.2mm
 3 = 3.8mm
 4 = 4.3mm
 6 = 4.6mm
 8 = 4.0mm

② Pitch: 20 = 2.00mm

④ Number of row:
 2=Double row

⑤ Number of Contacts:
 Single row=01(1x1) to 40(1x40)
 Double row=04(2x2) to 80(2x40)

⑥ Tail & Mounting Style:
 G=Splint Type

⑦ Contact Plated
 0=Tin
 1=Gold Flash
 2=Gold 3u"
 3=Gold 5u"
 4=Gold 10u"
 5=Gold 15u"
 6= Gold 30u"
 A=Gold 1.5u"
 B=Gold 2u"

⑧ Material Type
 0=PPS
 1=PBT
 2=LCP
 3=Nylon-9T
 4=Nylon-6T
 5=PA46

⑨ Color:1=Black
 ⑩ Customer Request