

Pin Header
Single Row
 Right Angle DIP Type

Pitch:5.08mm
 2.54mm

Series
 46U 51




Odia 奥比亚

Tel: (+86)0755-28248661/2/3
 Fax: (+86)0755-27857873



SPECIFICATIONS (技术参数):
 Current Rating (额定电流): 3.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 600VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS(材质):
 Contact Material (接触件材质): Copper Alloy
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: PBT

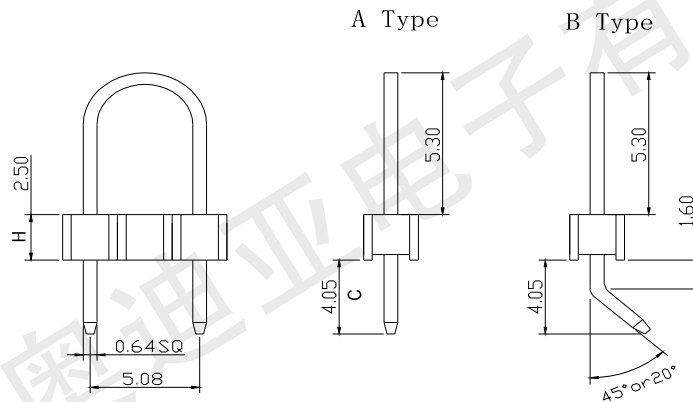

46U 51

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 46U 51 1 1 XX C 1 4 10 0

① Series No.:
 46U

③ Insulator Height:
 1=2.50mm
 3=2.00mm
 5=1.50mm

② Pitch: 51 = 5.08 mm
 25=2.54 mm

④ Number of row:
 1=Sing row

⑤ Number of Contacts:
 02=46U

⑥ Tail & Mounting Style:
 A=A Type(46U)
 B1=B Type 45 °(46U)
 B2=B Type 20 °(46U)

⑦ Contact Plated
 0=Tin
 1=Gold Flash
 2=Gold 3u"
 3=Gold 5u"
 4=Gold 10u"
 5=Gold 15u"
 6= Gold 30u"
 A=Gold 1.5u"
 B=Gold 2u"

⑧ Material Type
 0=PPS 3=Nylon-9T
 1=PBT 4=Nylon-6T
 2=LCP 5=PA46

⑨ "A" Length
 10=10.00mm
 00=46U

⑩ Customer Request