

Pin Header

Triple Row/ Straight DIP Type

Pitch:2.54mm


Series

460 25

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873

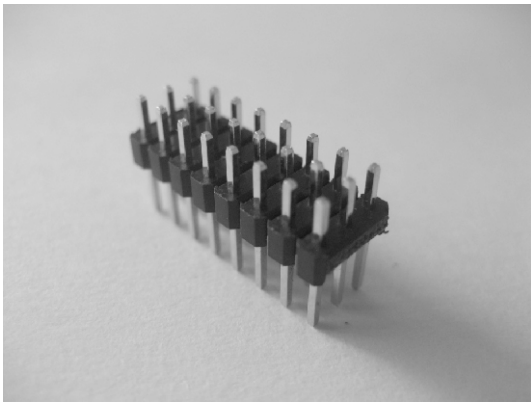


SPECIFICATIONS (技术参数):

Current Rating (额定电流):	3.0 AMP
Contact Resistance (接触电阻):	30mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	600VAC/minute
Operation Temperature (工作温度):	-40°C to +105°C

MATERIALS(材质):

Contact Material (接触件材质):	Copper Alloy
Contact Plating (接触件电镀):	Gold or Tin over 50 μ "Ni
Insulator Material (绝缘体材质):	Polyester(UL94V-0)
	Standard: PBT

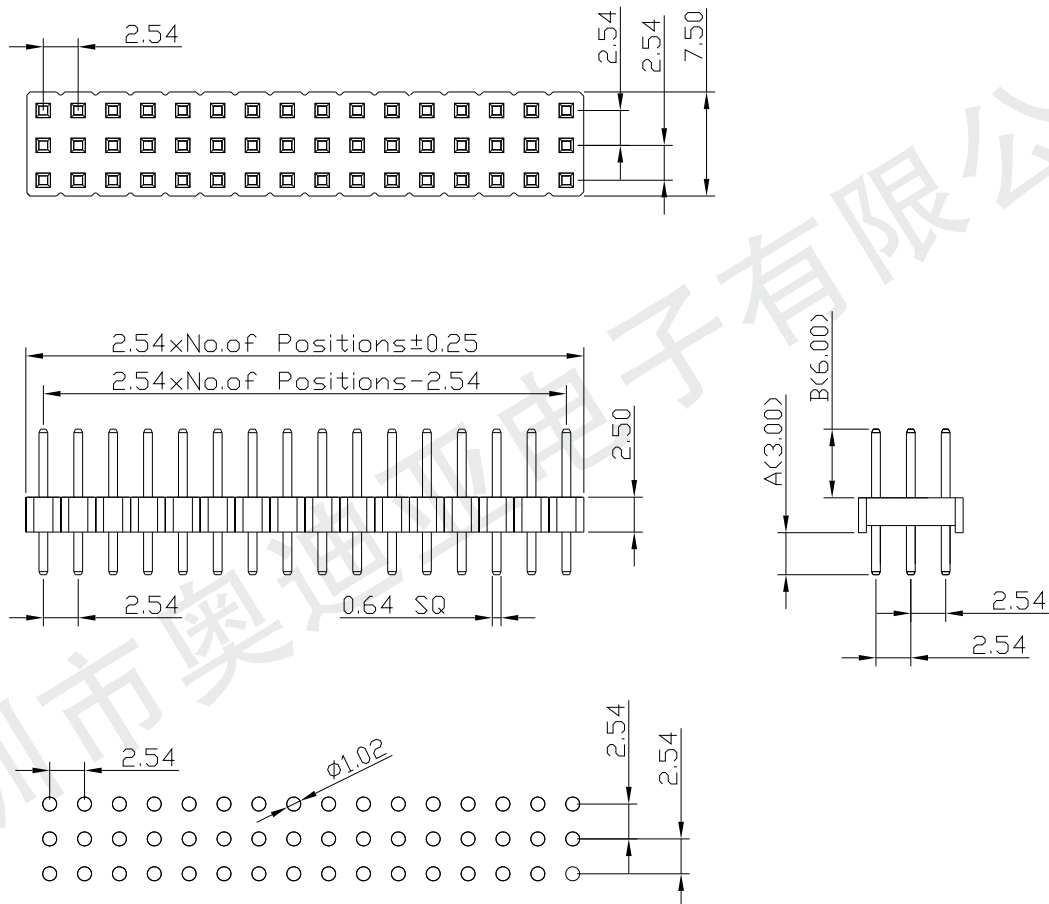

PCB LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
460 25 1 3 075 S 1 4 1

① Series No.: 460 = Pin Header
② Pitch: 25 = 2.54mm
③ Insulator Height: 1 = 2.50mm

④ Number of row: 3=Triple row
⑤ Number of Contacts: Triple row = 003 to 120
⑥ Tail & Mounting Style: S=Straight DIP type R=Right Angle DIP Type

⑦ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6=Gold 30u" A=Gold 1.5u"
B=Gold 2u"
⑧ Material Type
0=PPS 3=Nylon-9T
1=PBT 4=Nylon-6T
2=LCP 5=PA46

⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier