

Female Header

Single / Dual Row ;DIP / Right Angle

Pitch:2.54 x2.54mm


Series

47Y 25 6

Odia 奥比亚

Tel: (+86)0755-28248661/2/3

Fax: (+86)0755-27857873




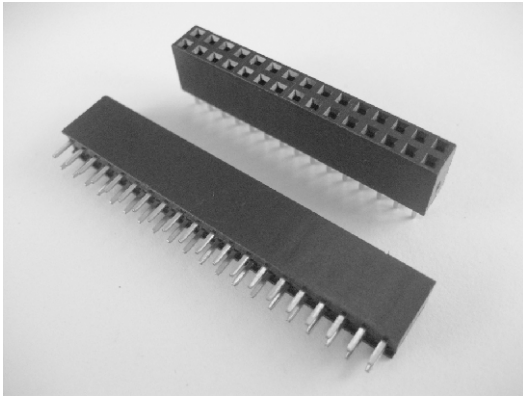


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 3.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 600VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Phosphor Bronze
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: PBT

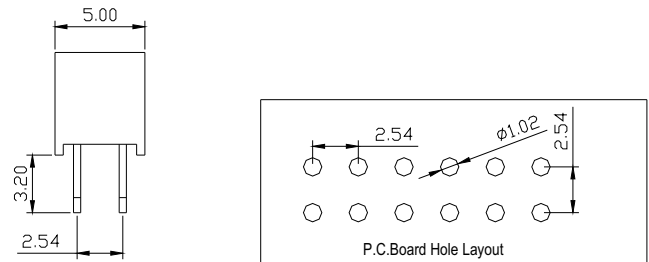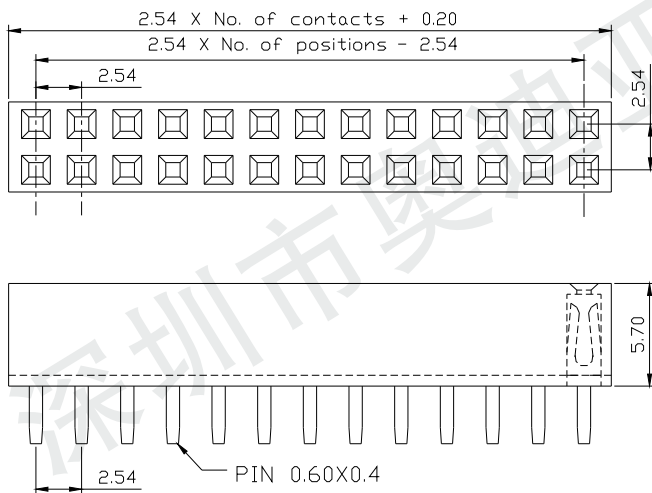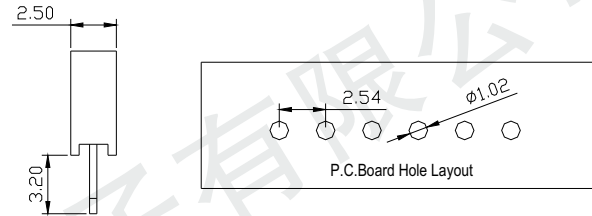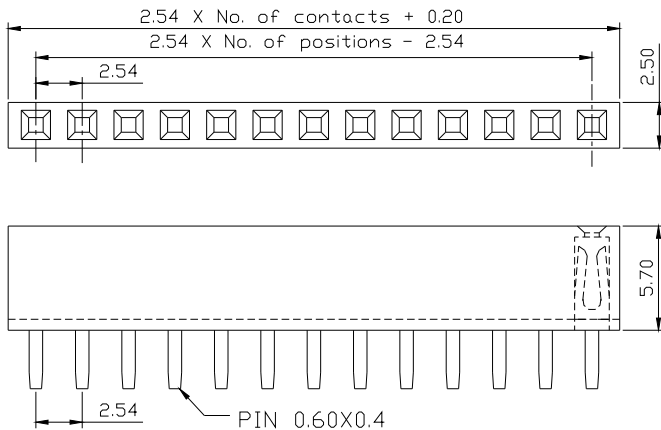

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 47Y 25 6 1 20 S 1 1 1 0

① Series No.: 47Y = Female Header
 ② Pitch: 25 = 2.54mm
 ③ Insulator Height(H): 6=5.70mm, 3=3.50mm

- ④ Number of row:
1=Sing row
2=Double row
- ⑤ Number of Contacts:
Single row=01(1x1)to 40(1x40)
Double row=04(2x2)to 80(2x40)
- ⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle Dip type
M=Straight SMT type
- ⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"
A=Gold 1.5u"
B=Gold 2u"
- ⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-9T
4=Nylon-6T
5=PA46
- ⑨ Color: 1=Black
- ⑩ Customer Request