

Female Header

Single / Dual Row ;DIP / S.M.T

Pitch:2.54 x2.54mm


Series

47U 25 X

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873

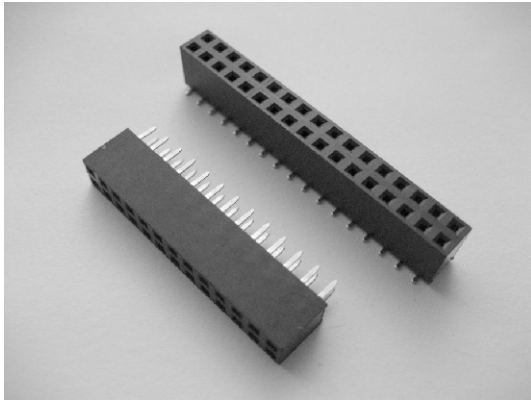




SPECIFICATIONS (技术参数):

Current Rating (额定电流): 3.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 600VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Phosphor Bronze
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: PBT

H=7.10mm(单/双排)
 H=8.50mm(单/双排)
 H=7.50mm(Double row双排)
 H=5.70mm(Double row双排)

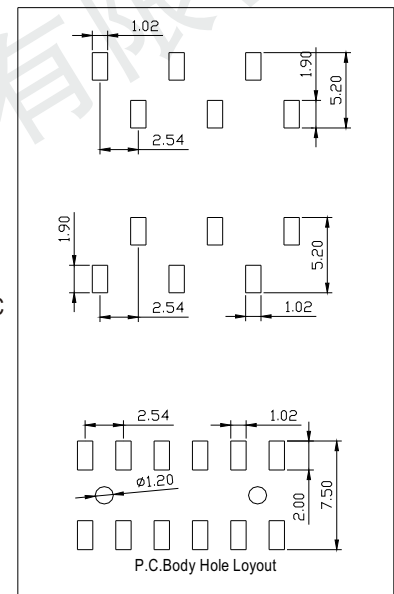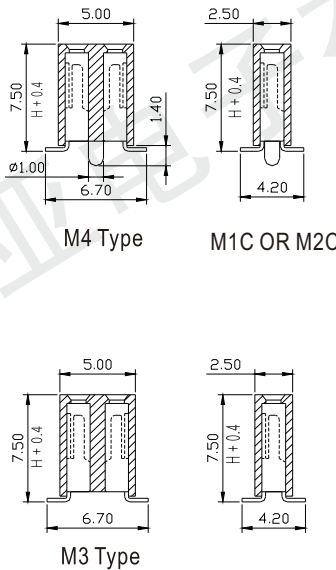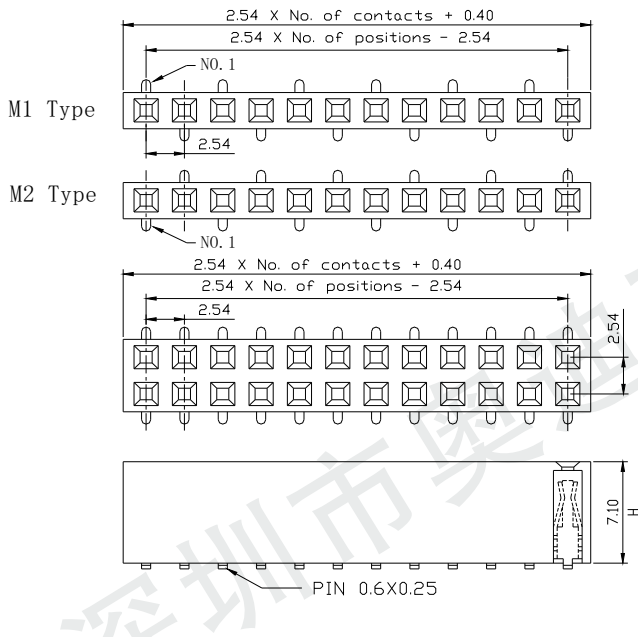

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 47U25 7 2 26 M 1 1 1 0

① Series No.:
 47U = Female Header

③ Insulator Height:
 7=7.10mm
 8=8.50mm / 3=3.50mm
 S=7.50mm(Double row)
 F=5.70mm(Double row)

② Pitch: 25= 2.54mm

④ Number of row:
 1=Sing row
 2=Double row

⑤ Number of Contacts:
 Single row=01(1x1)to 40(1x40)
 Double row=04(2x2)to 80(2x40)

⑥ Tail & Mounting Style:
 S=Straight DIP type
 M=Straight SMT type

⑦ Contact Plated
 0=Tin
 1=Gold Flash
 2=Gold 3u"
 3=Gold 5u"
 4=Gold 10u"
 5=Gold 15u"
 6= Gold 30u"
 A=Gold 1.5u"
 B=Gold 2u"

⑧ Material Type
 0=PPS
 1=PBT
 2=LCP
 3=Nylon-9T
 4=Nylon-6T
 5=PA46

⑨ Color: 1=Black
 ⑩ Customer Request