

Pin Header

Dual Row / Right Angle Type

Pitch:2.54mm


Series

467 25

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873

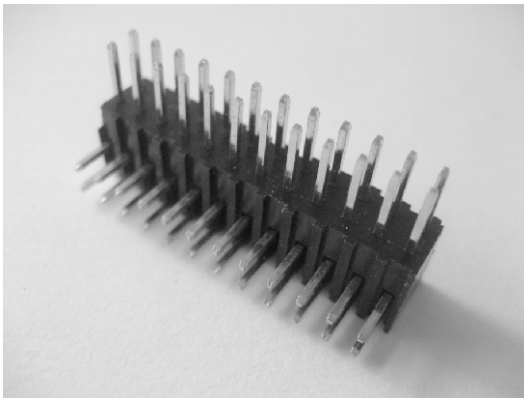


SPECIFICATIONS (技术参数):

Current Rating (额定电流):	3.0 AMP
Contact Resistance (接触电阻):	30mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	600VAC/minute
Operation Temperature (工作温度):	-40°C to +105°C

MATERIALS(材质):

Contact Material (接触件材质):	Copper Alloy
Contact Plating (接触件电镀):	Gold or Tin over 50 μ "Ni
Insulator Material (绝缘体材质):	Polyester(UL94V-0)
	Standard: PBT

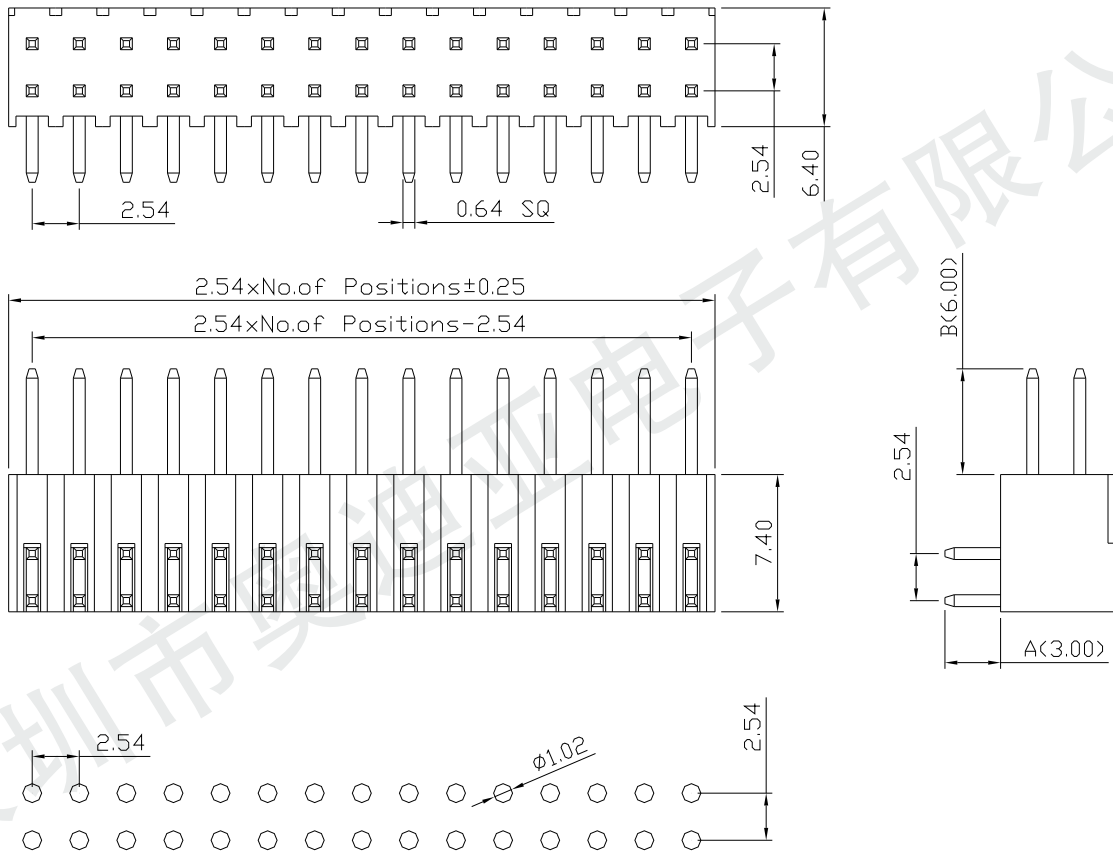

PCB LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
467 25 7 2 12 R 1 1 1

① Series No.: 467= Pin Header
② Pitch: 25 = 2.54mm
③ Insulator Height: 7 = 7.40mm

- | | | |
|--|---|--|
| ④ Number of row:
1=Sing row
2=Double row | ⑦ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6= Gold 30u" A=Gold 1.5u"
B=Gold 2u" | ⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier |
| ⑤ Number of Contacts:
Double row=04(2x2)to 80(2x40) | ⑧ Material Type
0=PPS 3=Nylon-9T
1=PBT 4=Nylon-6T
2=LCP 5=PA46 | |
| ⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle DIP Type
M=Straight SMT type | | |