

Pin Header Single Row


Pitch:3.96mm

Series
460 39

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873

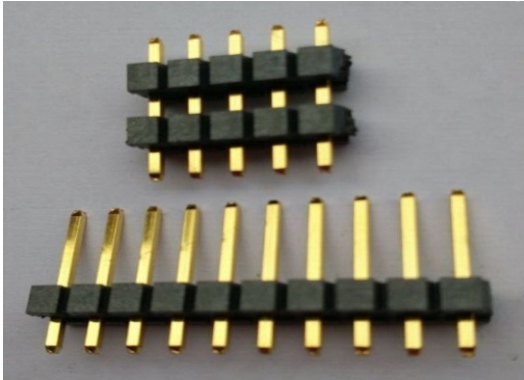


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 5.0 A
 Withstand Voltage (耐压值): 600V AC/Min
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 30mΩ Max
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Phosphor Bronze or Brass
 Contact Plating (接触件电镀): Gold or Tin over 50u"Ni
 Insulator (绝缘体材质): PBT OR PA6T(UL94V-0)

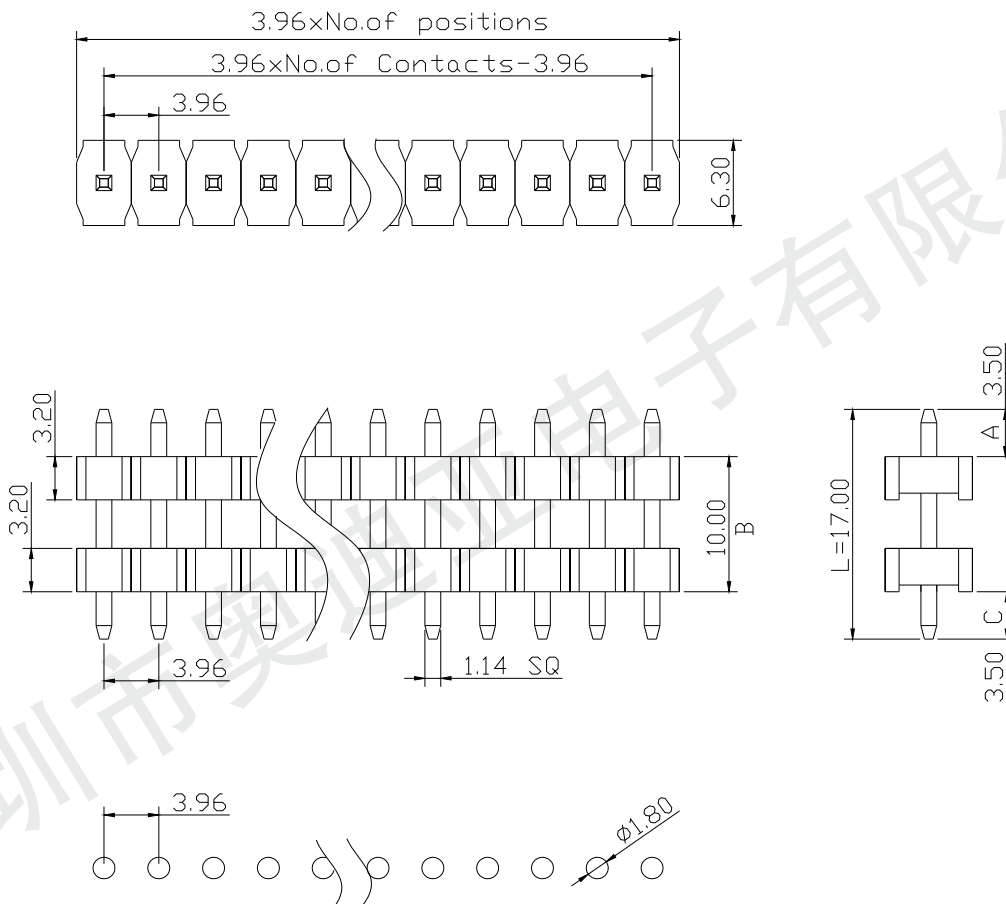

PCB LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 460 39 C 1 XX S 1 2 2 17

① Series No.:
460

③ Insulator Height:
C=3.20mm

② Pitch: 39 = 3.96 mm

④ Number of row:
1=Sing row

⑤ Number of Contacts:
01(1x1)to 20(1x20)

⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle DIP Type
M=Straight SMT type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"
A=Gold 1.5u"
B=Gold 2u"

⑧ Material Type
0=PPS 3=Nylon-9T
1=PBT 4=Nylon-6T
2=LCP 5=PA46

⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier

⑩ Pin Length
17=17.00mm