


Ejector Header
Straight SMT Type

Pitch:2.54mm

Series
4301 25

Odia 奥比亚

Tel:(+86)0755-28248661/2/3
Fax:(+86)0755-27857873

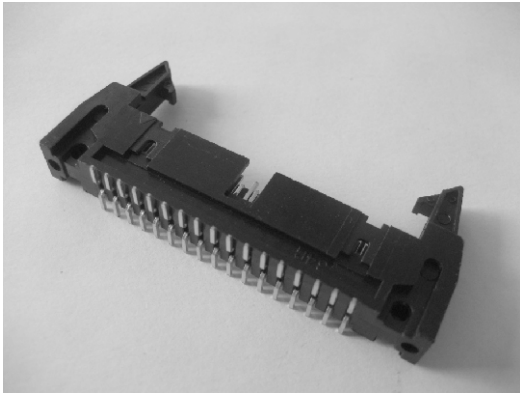


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 3.0 AMP
Contact Resistance (接触电阻): 20mΩ Max
Insulation Resistance (绝缘电阻): 1000MΩ Min
Withstand Voltage (耐压值): 500VAC/minute
Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Brass
Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
Insulator Material (绝缘体材质): Polyester(UL94V-0)
Standard: PBT

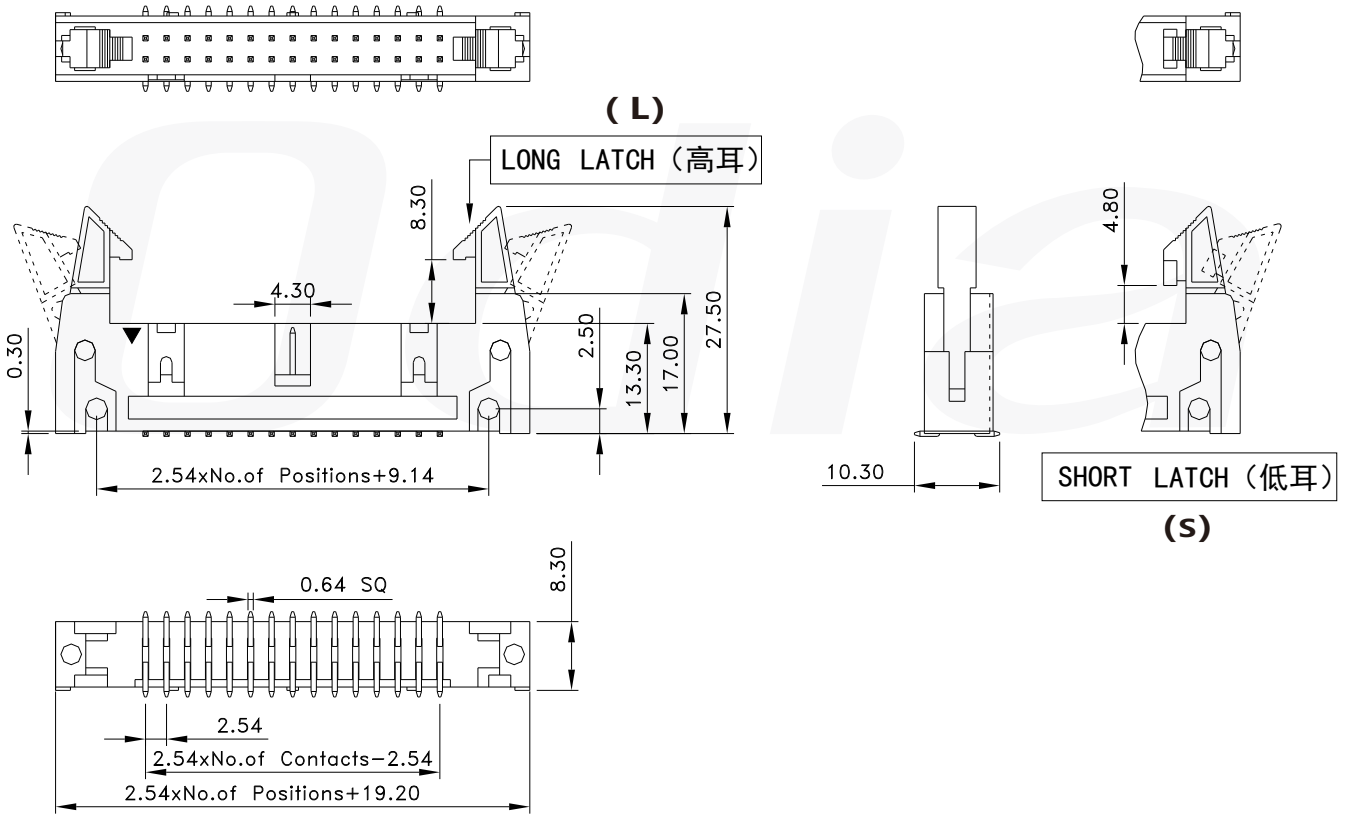

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
430125 0 26 M 1 1 B 0

① Series No.:
4301 = Ejector Header

② Pitch:
25= 2.54 x 2.54mm

③ Insulator Height:
0 = Standard

④ Number of Contacts:
06Pin~64Pin

⑤ Tail & Mounting Style:
S= Straight Dip Type
R= Right Angle Dip Type
M= Straight SMT Type

⑥ Contact Plated
0= Tin
1= Gold Flash
2= Gold 3u"
3= Gold 5u"
4= Gold 10u"
5= Gold 15u"
6= Gold 30u"
A= Gold 1.5u"
B= Gold 2u"

⑦ Material Type
0= PPS
1= PBT
2= LCP
3= Nylon-9T
4= Nylon-6T
5= PA46
6= Nylon-66

⑧ Color:
B= Black
U= Blue
R= Red
W= White
Y= Yellow
G= Grey

⑨ Customer Request