

# Box Header

Straight Dip Type / Right Angle Dip Type/S.M.T Type

Pitch:1.27 x1.27mm


# Series

4302 12

# Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873










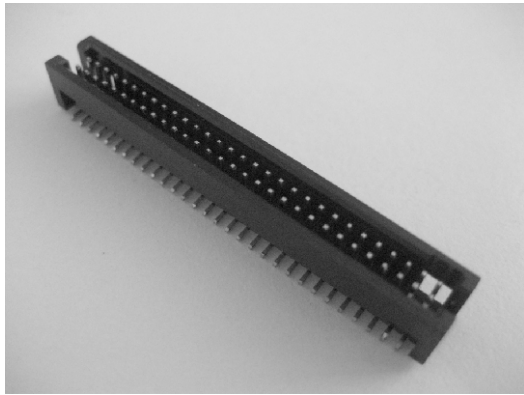


### SPECIFICATIONS (技术参数):

Current Rating (额定电流): 1.0 A  
 Contact Resistance (接触电阻): 30mΩMax  
 Insulation Resistance (绝缘电阻): 1000MΩMin  
 Withstand Voltage (耐压值): 300VAC/minute  
 Operation Temperature (工作温度): -40℃to +105℃

### MATERIALS (材质):

Contact Material (接触件材质): Copper Alloy  
 Contact Plating (接触件电镀): Gold or Tin over 50u"Ni  
 Insulator (绝缘体): Glass Filled Polyester(UL94V-0)  
 Standard: Nylon-6T

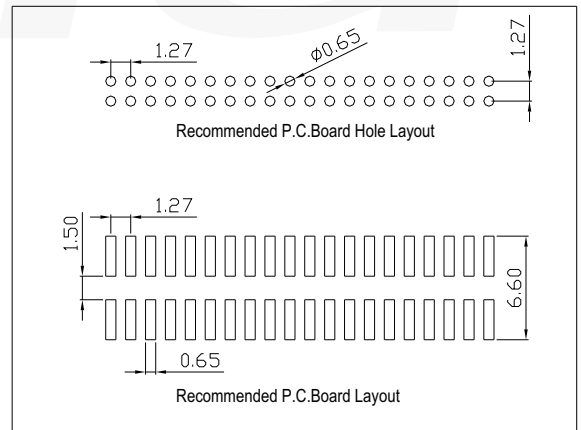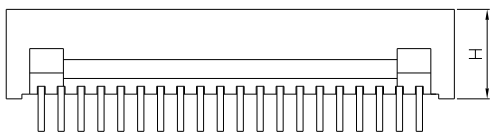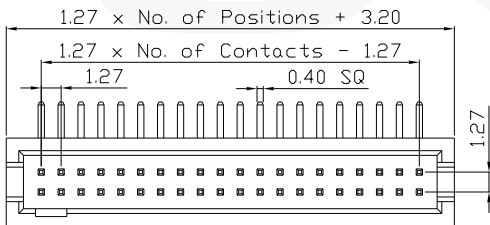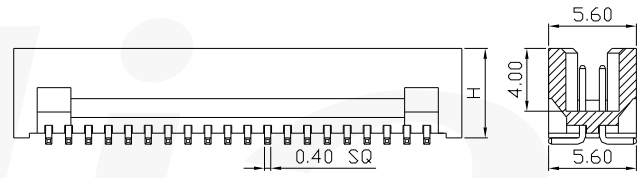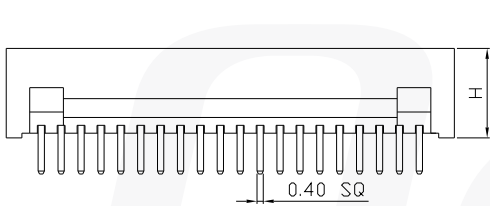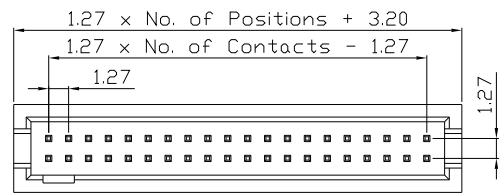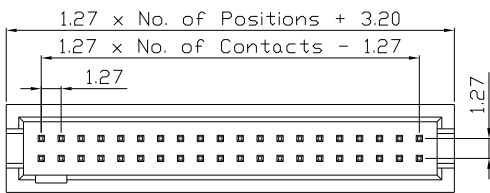

## Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨  
430212 7 40 S 1 4 B 0

① Series No.:  
4302 = Box Header

② Pitch:  
12 = 1.27 x 1.27mm

③ Insulator Height (H):  
7=5.70mm

④ Number of Contacts:  
06Pin(2x3)~64Pin(2x32)

⑤ Tail & Mounting Style:  
S=Straight Dip Type  
R=Right Angle Dip Type  
M=S.M.T Type

⑥ Contact Plated  
0=Tin  
1=Gold Flash  
2=Gold 3u"  
3=Gold 5u"  
4=Gold 10u"  
5=Gold 15u"  
6=Gold 30u"  
A=Gold 1.5u"  
B=Gold 2u"

⑦ Material Type  
0=PPS  
1=PBT  
2=LCP  
3=Nylon-9T  
4=Nylon-6T  
5=PA46

⑧ Color:  
B=Black  
U=Blue  
R=Red  
W=White  
Y=Yellow  
G=Grey

⑨ Customer Request