

# Box Header

Straight Dip Type / Right Angle Dip Type/S.M.T Type

Pitch:1.27 x1.27mm


# Series

4302 12

# Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873




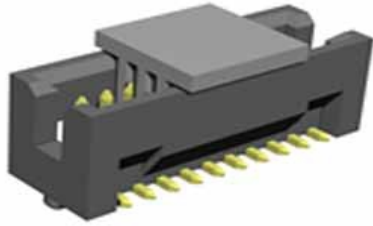


### SPECIFICATIONS (技术参数):

Current Rating (额定电流):	1.0 A
Contact Resistance (接触电阻):	30mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	300VAC/minute
Operation Temperature (工作温度):	-40℃ to +105℃

### MATERIALS (材质):

Contact Material (接触件材质):	Copper Alloy
Contact Plating (接触件电镀):	Gold or Tin over 50u"Ni
Insulator (绝缘体):	Glass Filled Polyester(UL94V-0) Standard: Nylon-6T

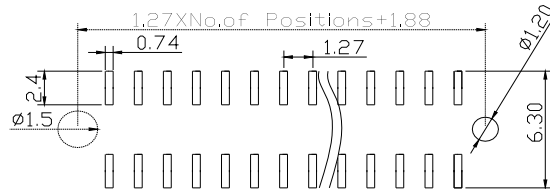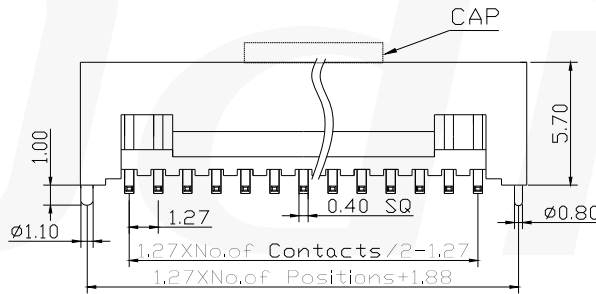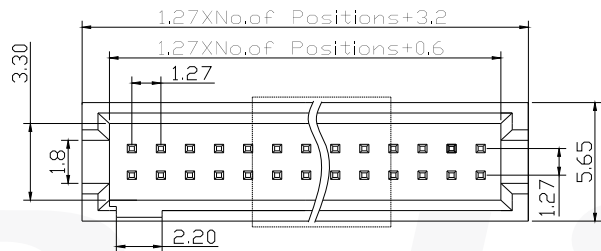

P. C. B. LAYOUT

## Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨  
430212 7 XX M 1 4 B M4

- ① Series No.:  
4302 = Box Header
- ② Pitch:  
12 = 1.27 x 1.27mm

- ③ Insulator Height (H) :  
7=5.70mm
- ④ Number of Contacts :  
06Pin(2x3)~64Pin(2x32)
- ⑤ Tail & Mounting Style:  
S= Straight Dip Type  
R= Right Angle Dip Type  
M= S.M.T Type
- ⑥ Contact Plated  
0= Tin  
1= Gold Flash  
2= Gold 3u"  
3= Gold 5u"  
4= Gold 10u"  
5= Gold 15u"  
6= Gold 30u"  
A= Gold 1.5u"  
B= Gold 2u"
- ⑦ Material Type  
0= PPS  
1= PBT  
2= LCP  
3= Nylon-9T  
4= Nylon-6T  
5= PA46
- ⑧ Color:  
B= Black  
U= Blue  
R= Red  
W= White  
Y= Yellow  
G= Grey
- ⑨ Customer Request  
M4= With the positioning column