

Box Header

Pitch:2.00mm

Straight Dip / Right Angle Dip Type/S.M.T Type

Series


4302 20

MX Type

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873




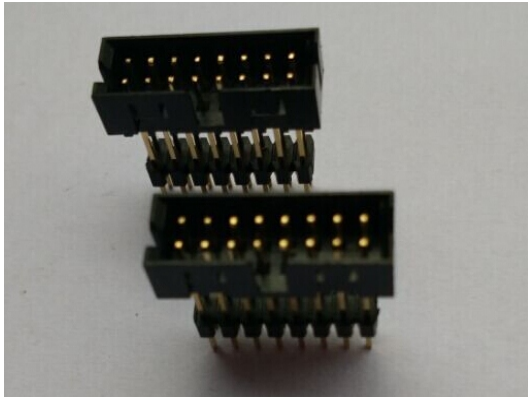


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 2.0 AMP
 Contact Resistance (接触电阻): 20mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 500VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Brass
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: PBT

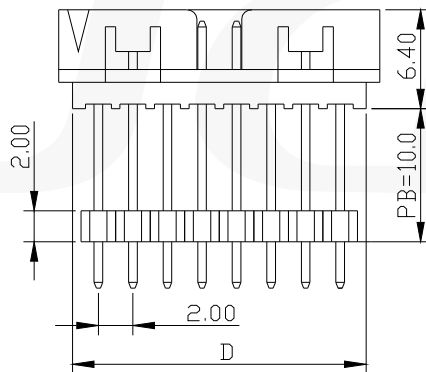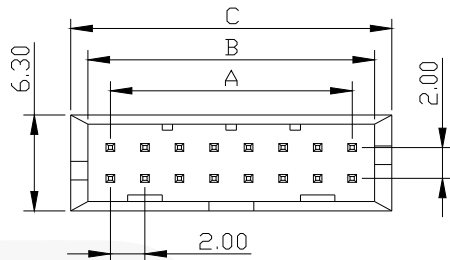

PIN NUMBER	A	B	C	D
2x4PIN	6.0	8.65	10.65	9.0
2x5PIN	8.0	10.65	12.65	11.0
2x6PIN	10.0	12.65	14.65	13.0
2x7PIN	12.0	14.65	16.65	15.0
2x8PIN	14.0	16.65	18.65	17.0
2x9PIN	16.0	18.65	20.65	19.0
2x10PIN	18.0	20.65	22.65	21.0
2x11PIN	20.0	22.65	24.65	23.0

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
4302 20 0 16 S 1 4 B MX

① Series No.:
4302 = Box Header

② Pitch:
20 = 2.00 x 2.00mm

③ Insulator Height:
0=Standard(6.40mm)

④ Number of Contacts:
08Pin(2x4)~22Pin(2x11)

⑤ Tail & Mounting Style:
S=Straight Dip Type
R=Right Angle Dip Type
M=S.M.T Type

⑥ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6=Gold 30u"
A=Gold 1.5u"
B=Gold 2u"

⑦ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-9T
4=Nylon-6T
5=PA46

⑧ Color:
B=Black
U=Blue
R=Red
W=White
Y=Yellow
G=Grey

⑨ Suffix No.:
MX=MX Type