


**Box Header / Ejector Header** Pitch:2.54mm  
Straight Dip / Right Angle Dip Type

**Series**  
4301 25

**Odia** 奥比亚

Tel: (+86)0755-28248661/2/3  
Fax: (+86)0755-27857873


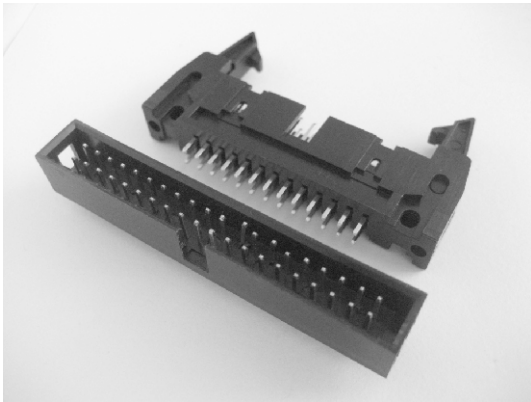


**SPECIFICATIONS (技术参数):**



Current Rating (额定电流): 3.0 AMP  
Contact Resistance (接触电阻): 20mΩ Max  
Insulation Resistance (绝缘电阻): 1000MΩ Min  
Withstand Voltage (耐压值): 500VAC/minute  
Operation Temperature (工作温度): -40°C to +105°C

**MATERIALS (材质):**


Contact Material (接触件材质): Brass  
Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni  
Insulator Material (绝缘体材质): Polyester(UL94V-0)  
Standard: PBT

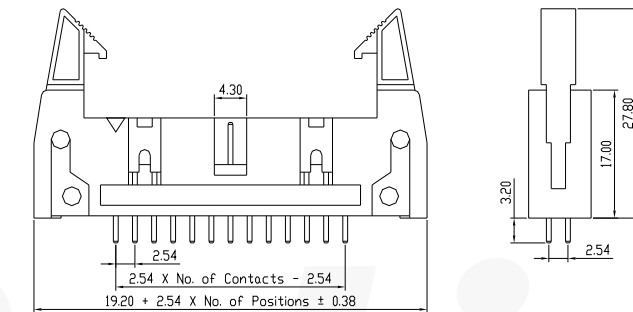

Series:4301 25

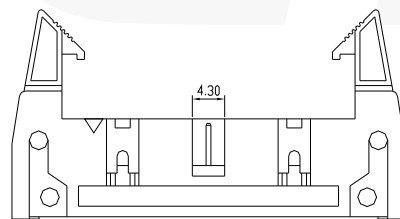

Series:4301 25

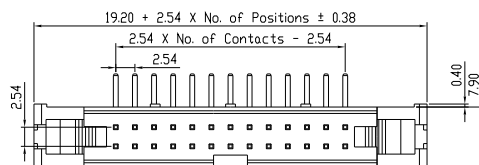

**Ordering Code**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨  
4301 25 0 40 S 1 1 B 0

- ① Series No.:  
4302 = Box Header  
4301 = Ejector Header
- ② Pitch:  
25 = 2.54 x 2.54mm

- ③ Insulator Height:  
0 = Standard
- ④ Number of Contacts:  
06Pin~64Pin
- ⑤ Tail & Mounting Style:  
S= Straight Dip Type  
R= Right Angle Dip Type
- ⑥ Contact Plated  
0= Tin  
1= Gold Flash  
2= Gold 3u"  
3= Gold 5u"  
4= Gold 10u"  
5= Gold 15u"  
6= Gold 30u"  
A= Gold 1.5u"  
B= Gold 2u"
- ⑦ Material Type  
0= PPS  
1= PBT  
2= LCP  
3= Nylon-9T  
4= Nylon-6T  
5= PA46
- ⑧ Color:  
B= Black  
U= Blue  
R= Red  
W= White  
Y= Yellow  
G= Grey
- ⑨ Customer Request