

# Box Header

Straight Dip / Right Angle Dip Type/S.M.T Type

Pitch:2.00mm


# Series

4302 20

# Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873







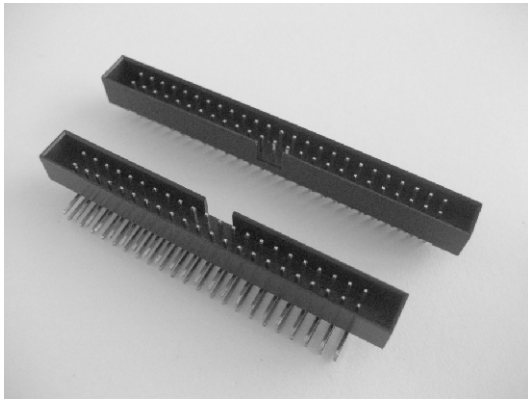


### SPECIFICATIONS (技术参数):

Current Rating (额定电流): 2.0 AMP  
 Contact Resistance (接触电阻): 20mΩ Max  
 Insulation Resistance (绝缘电阻): 1000MΩ Min  
 Withstand Voltage (耐压值): 500VAC/minute  
 Operation Temperature (工作温度): -40°C to +105°C

### MATERIALS (材质):

Contact Material (接触件材质): Brass  
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni  
 Insulator Material (绝缘体材质): Polyester(UL94V-0)  
 Standard: PBT

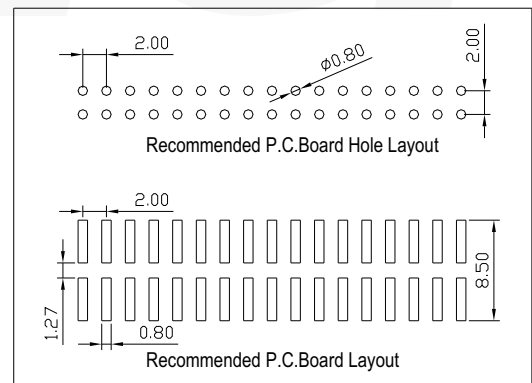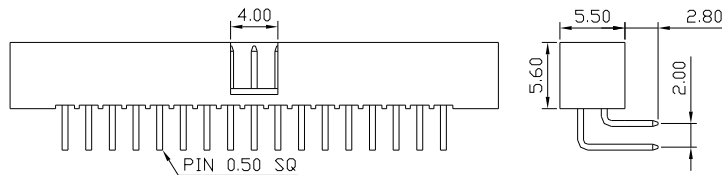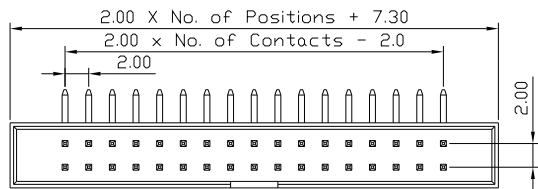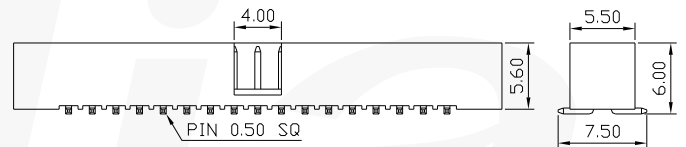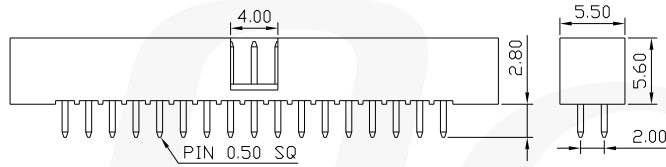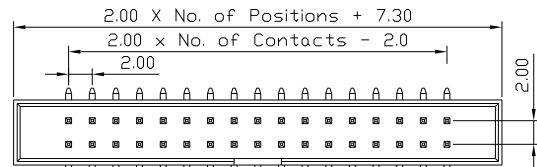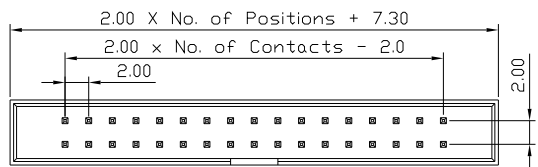

## Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨  
 4302 20 6 44 S 1 4 B 0

- ① Series No.:  
4302 = Box Header
- ② Pitch:  
20 = 2.00 x 2.00mm

- ③ Insulator Height:  
6 = 5.6mm
- ④ Number of Contacts:  
06Pin~64Pin
- ⑤ Tail & Mounting Style:  
S=Straight Dip Type  
R=Right Angle Dip Type  
M=S.M.T Type
- ⑥ Contact Plated  
0=Tin  
1=Gold Flash  
2=Gold 3u"  
3=Gold 5u"  
4=Gold 10u"  
5=Gold 15u"  
6=Gold 30u"  
A=Gold 1.5u"  
B=Gold 2u"
- ⑦ Material Type  
0=PPS  
1=PBT  
2=LCP  
3=Nylon-9T  
4=Nylon-6T  
5=PA46
- ⑧ Color:  
B=Black  
U=Blue  
R=Red  
W=White  
Y=Yellow  
G=Grey
- ⑨ Customer Request