

BOX Header

Straight Dip / Right Angle / S.M.T Type

Pitch:2.54mm


Series

4307

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873




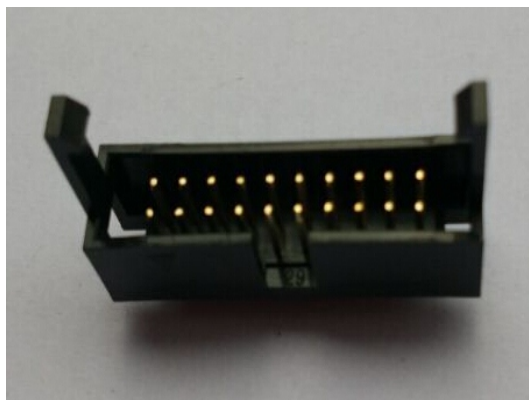


SPECIFICATIONS (技术参数):

Current Rating (额定电流):	3.0 AMP
Contact Resistance (接触电阻):	20mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	500VAC/minute
Operation Temperature (工作温度):	-40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质):	Brass
Contact Plating (接触件电镀):	Gold or Tin over 50 μ "Ni
Insulator Material (绝缘体材质):	Polyester(UL94V-0)
	Standard: PBT

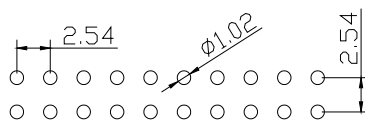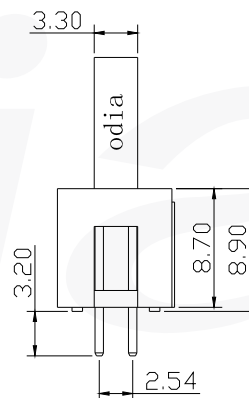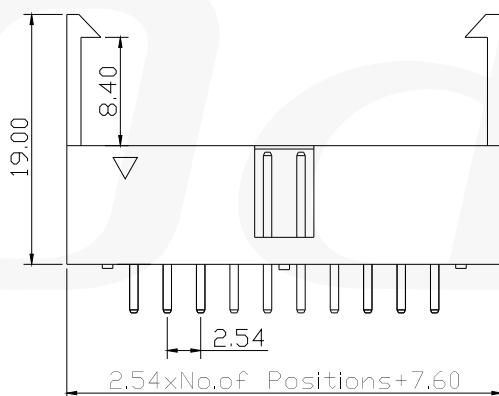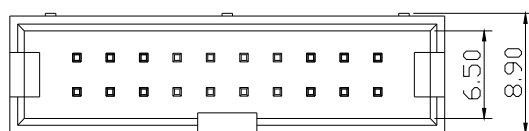

PCB LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
4307 25 0 20 S 1 1 B 0

① Series No.:
4307=Box Header

② Pitch:
25 = 2.54 x 2.54mm

③ Insulator Height:
0=Standard

④ Number of Contacts:
06Pin(2x3)~64Pin(2x32)

⑤ Tail & Mounting Style:
S=Straight Dip Type
R=Right Angle Dip Type
M=S.M.T Type

⑥ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6=Gold 30u"
A=Gold 1.5u"
B=Gold 2u"

⑦ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-9T
4=Nylon-6T
5=PA46

⑧ Color:
B=Black
U=Blue
R=Red
W=White
Y=Yellow
G=Grey

⑨ Customer Request